




AC01324

HEAT SHIELD FOR SURROUND/SHELF

INSTALLATION INSTRUCTIONS


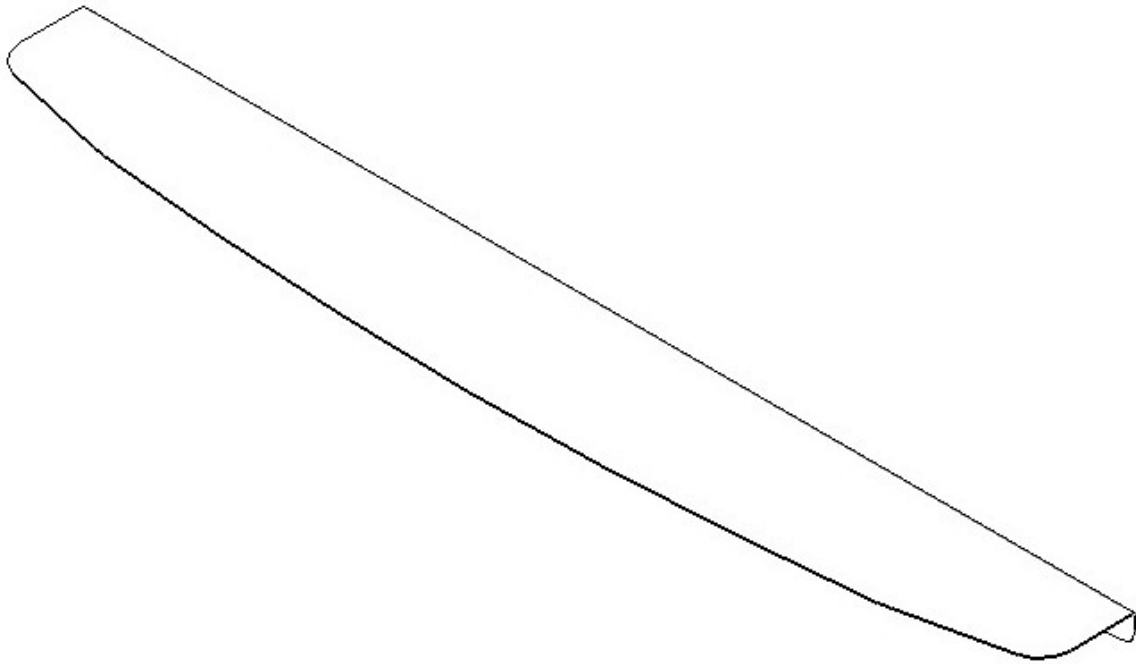


Refer to the fireplace's owner's manual for more details.

Stove Builder International Inc.
250, rue de Copenhague
Saint-Augustin-de-Desmaures Quebec, Canada G3A 2H3

45775A
17-10-2014

INSTALLATION WITH SHELF (MANDATORY AC01324 HEAT SHIELD)

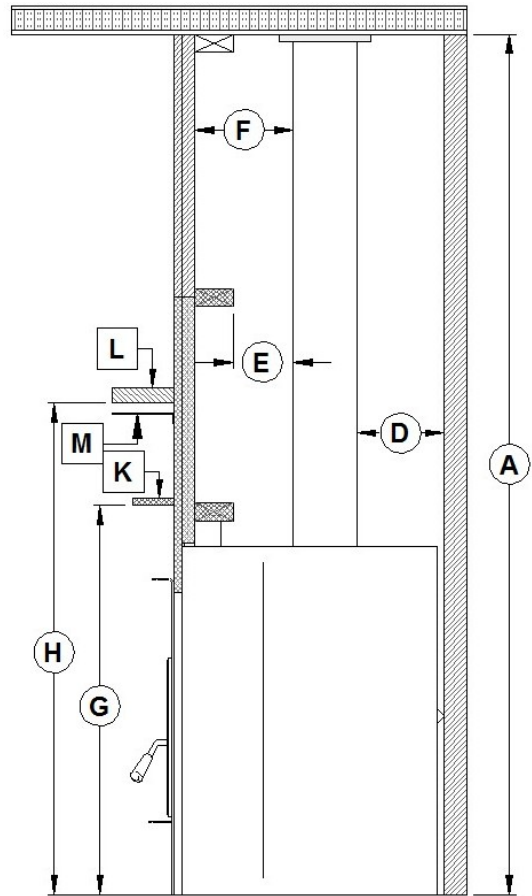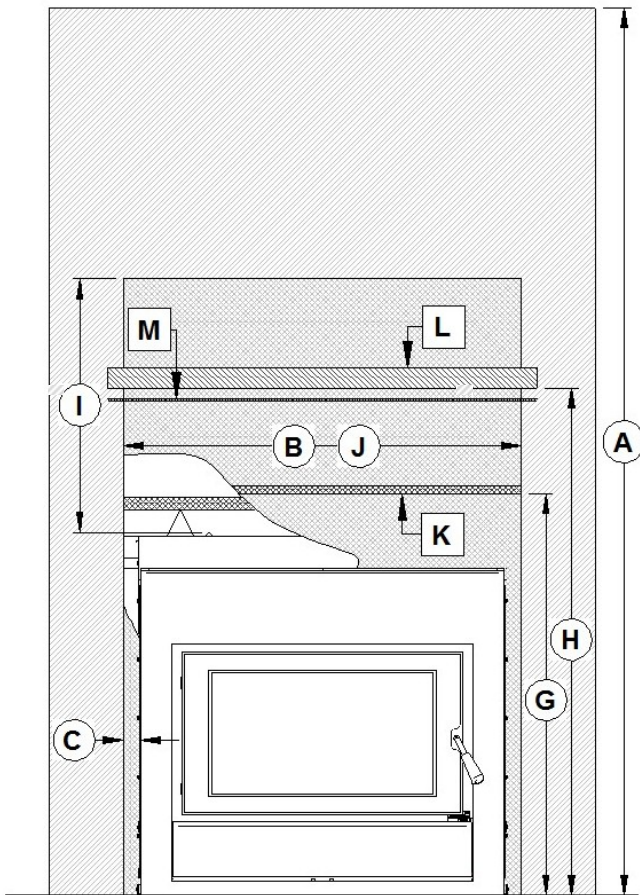

CLEARANCES	
A*	84" (2134 mm)
B	37 3/4" (959 mm) MIN.
C	1 5/8" (41 mm) MIN.
D*	6 1/2" (165 mm) MIN.
E	4" (102 mm)
F	7 1/2" (191mm)
G	38" (965mm)
H	48" (1219mm) MIN.
I	24" (610mm)
J	37 3/4" (959 mm) MIN.

* When drywall panels or any other finishing material inside the chase around the fireplace is to be used, add its thickness to the measurement.


K	MANDATORY AC01324 HEAT SHIELD FOR SURROUND/SHELF
L	COMBUSTIBLE SHELF (SEE SECTION 6.3.3.3)
M**	ALTERNATIVE NON-COMBUSTIBLE HEAT SHIELD

IF A COMBUSTIBLE SHELF IS INSTALLED ABOVE THE FIREPLACE, IT MUST ABSOLUTELY BE PROTECTED WITH THE HEAT SHIELD FOR SURROUND/SHELF (K). THE POSITION SHOWN IN (G) IS SPECIFIC TO OPTION AC01324.**

** An alternative to the position of the heat shield shown in (K) would be to make a non-combustible heat shield (M) that meets the following requirements: Must be located exactly 1" below the combustibile shelf (L). Must have the same depth as the shelf to be protected. Must have at least the same width as the fireplace and must be perfectly centered with the shelf.

THE INSTALLATION OF A COMBUSTIBLE SHELF ABOVE THE FP14 FIREPLACE REQUIRES THE INSTALLATION OF THE HEAT SHIELD FOR SURROUND/SHELF AC01324 (K) **.

** An alternative to the position of the heat shield shown in (K) would be to make a non-combustible heat shield (M) that meets the following requirements: Must be located exactly 1" below the combustibile shelf (L). Must have the same depth as the shelf to be protected. Must have at least the same width as the fireplace and must be perfectly centered with the shelf.

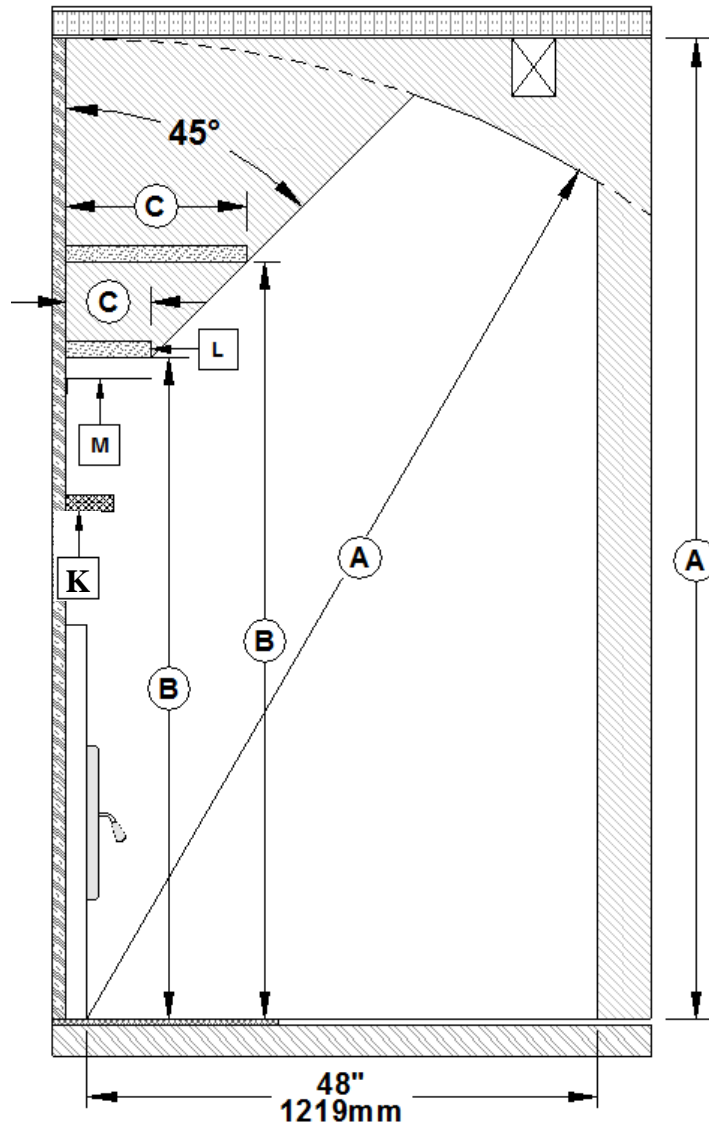

CLEARANCES	
A	84" (2134 mm)

SHELF POSITIONING	
B	C
48" (1219 mm)	6" (152 mm)
50" (1270 mm)	8" (203 mm)
52" (1321 mm)	10" (254 mm)
54" (1372 mm)	12" (305 mm)